
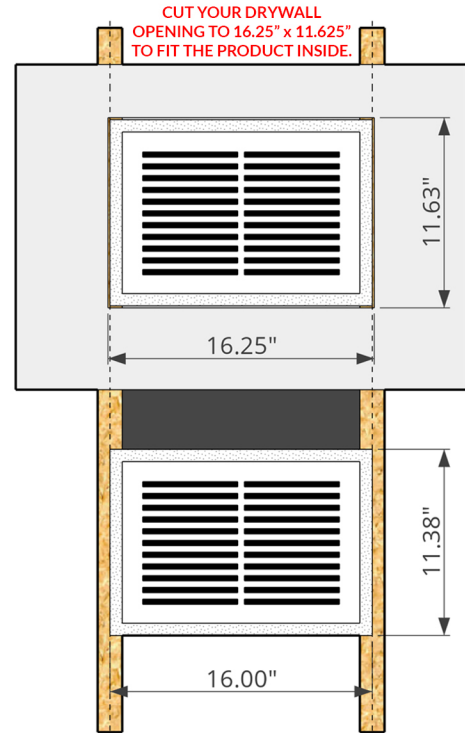


A premium flush mount cold air return cover which replaces the cover for a 14"x8" opening. This cover fits into the drywall opening of 16.25"x11.625" and has a vented/slotted area of 12"x7.5".

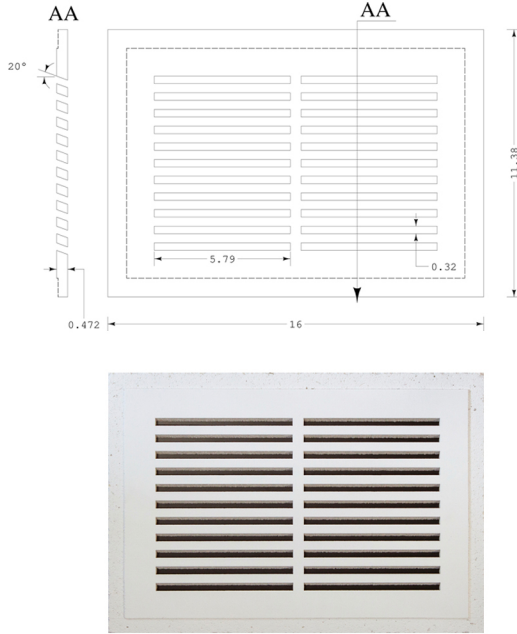

APPLICATION

- Designed for 1/2" for a permanent installation.
- Suitable for low and high wall installations.
- Screws directly to your wall studs to allow it to be flush.
- Finish taping and seaming the perimeter edge with your drywall.
- **(PRO TIP: cover the slots with painters tape to avoid drywall compound getting in them).**
- Prime your wall and paint it to your wall colour
- The cold air comes primed white and ready for your paint colour.

FEATURES

- Triple fibre reinforced cement board grill.
- Easy installation, primed and ready to paint.
- Machined outer edge to allow for screws, tape and drywall compound
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 41 square inches (265 square centimeters) of open area.
- Slot Size: 0.32" x 5.8" (8mm x 147mm).
- 22 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 16" x 11.375" x 0.5" (406mm x 289mm x 12mm).
- Product weight is 2 pounds (0.9 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount cold air return cover which replaces the cover for a 24"x6" opening. This cover fits into the drywall opening of 24.25"x10.25" and has a vented/slotted area of 20.5"x6".

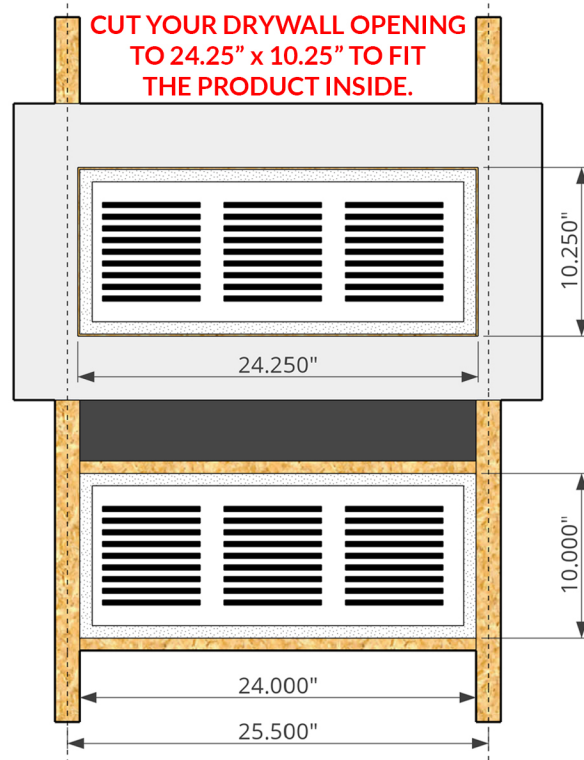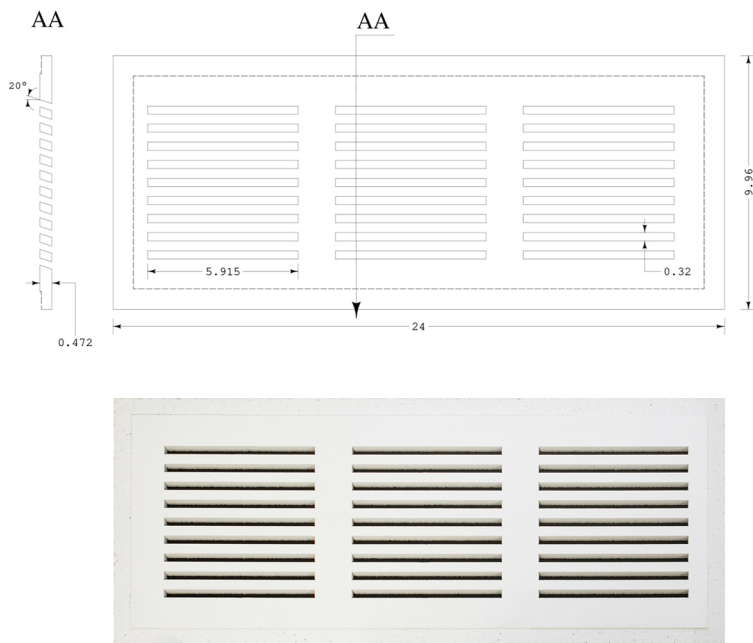

APPLICATION

- Designed for 1/2" for a permanent installation.
- Suitable for low and high wall installations.
- Screws directly to your wall studs to allow it to be flush.
- Finish taping and seaming the perimetre edge with your drywall.
- **(PRO TIP: cover the slots with painters tape to avoid drywall compound getting in them).**
- Prime your wall and paint it to your wall colour
- The cold air comes primed white and ready for your paint colour.

FEATURES

- Triple fibre reinforced cement board grill.
- Easy installation, primed and ready to paint.
- Machined outer edge to allow for screws, tape and drywall compound
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS


- Over 51 square inches (329 square centimeters) of open area.
- Slot Size: 5.91" x 0.32" (150mm x 8mm).
- 27 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 24" x 10" x 0.5" (609mm x 254mm x 12mm).
- Product weight is 3.75 pounds (1.7 kilograms)

MATERIAL SPECIFICATIONS

Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
 Density - 0.95 g/cm³
 Water Content - 12%
 Chloride Ion Content - 0%
 Formaldehyde Release - 0%
 Asbestos Content - 0%
 Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
 Water Absorption - 27%
 Resistant Bending Strength - 8 MPa
 Impact Resistance - 1.5 J/m
 Nail-Withdrawal strength - 16 N/mm
 Water Permeability - No water vapour after 24 hours' test
 Refractoriness (Pyrometric cone Test) - 4H
 pH Value - 6.7{8.0}
 Thermal conductivity - 0.2 W/(mK)
 Moisture Movement - 0.25 %
 Heat Shrinkage Rate - 0.05
 Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount cold air return cover which replaces the cover for a 30"x6" opening. This cover fits into the drywall opening of 32.25"x10.25" and has a vented/slotted area of 28"x6".

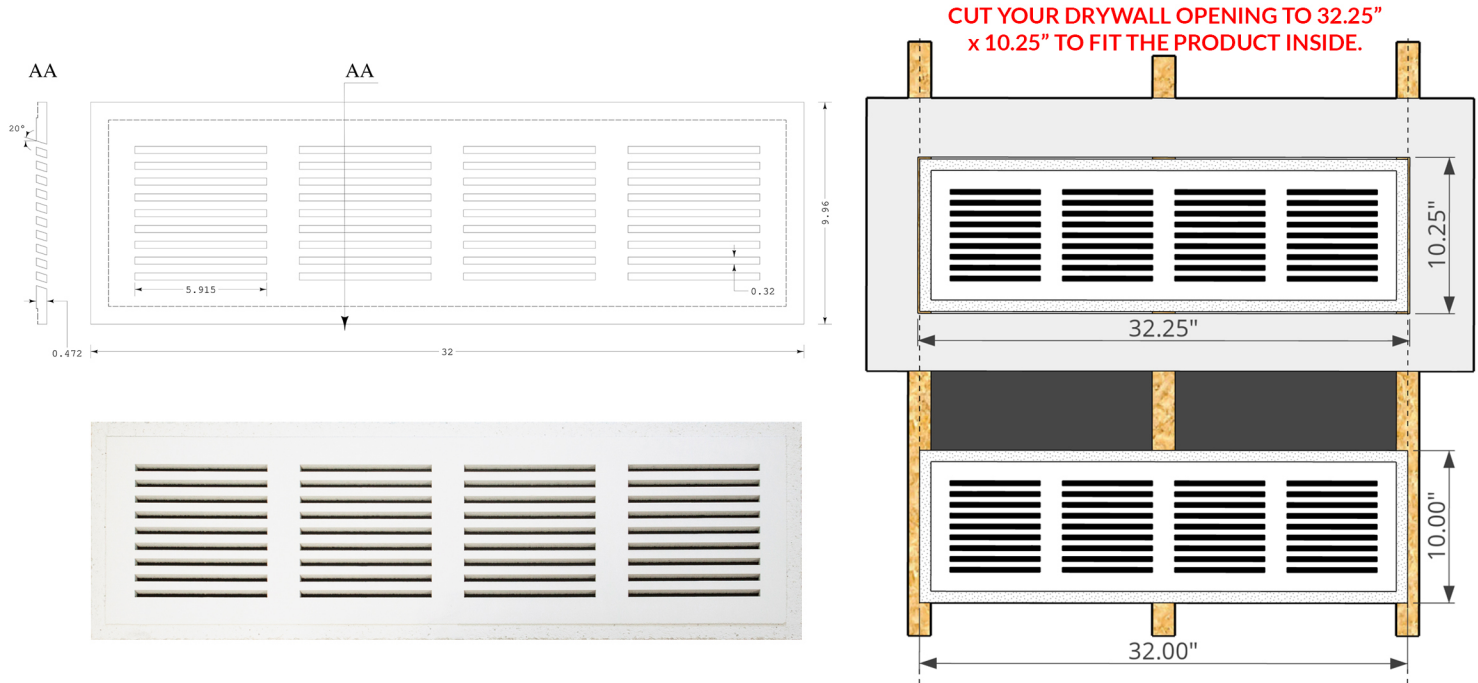

APPLICATION

- Designed for 1/2" for a permanent installation.
- Suitable for low and high wall installations.
- Screws directly to your wall studs to allow it to be flush.
- Finish taping and seaming the perimetre edge with your drywall.
- **(PRO TIP: cover the slots with painters tape to avoid drywall compound getting in them).**
- Prime your wall and paint it to your wall colour
- The cold air comes primed white and ready for your paint colour.

FEATURES

- Triple fibre reinforced cement board grill.
- Easy installation, primed and ready to paint.
- Machined outer edge to allow for screws, tape and drywall compound
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 68 square inches (439 square centimeters) of open area.
- Slot Size: 0.32" x 5.91" (8mm x 150mm).
- 36 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 32" x 10" x 0.5" (813mm x 254mm x 12mm).
- Product weight is 4 pounds (1.8 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount cold air return cover which replaces the cover for a 14"x8" opening. This cover fits into the drywall opening of 13.875"x11.5" and has a vented/slotted area of 12"x8.75". This item is taller than fitting between 2 studs.

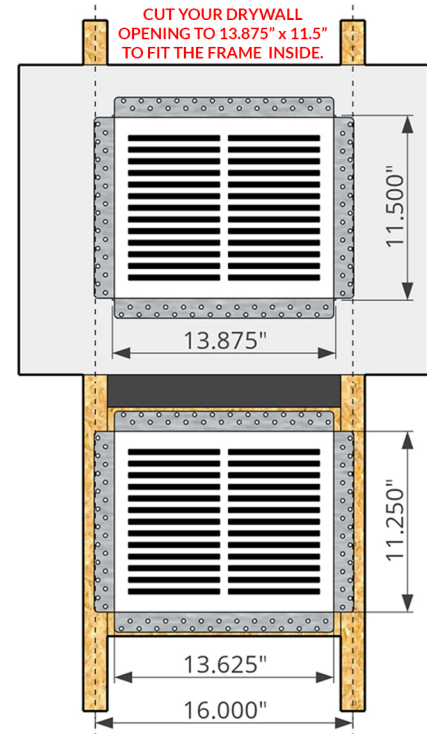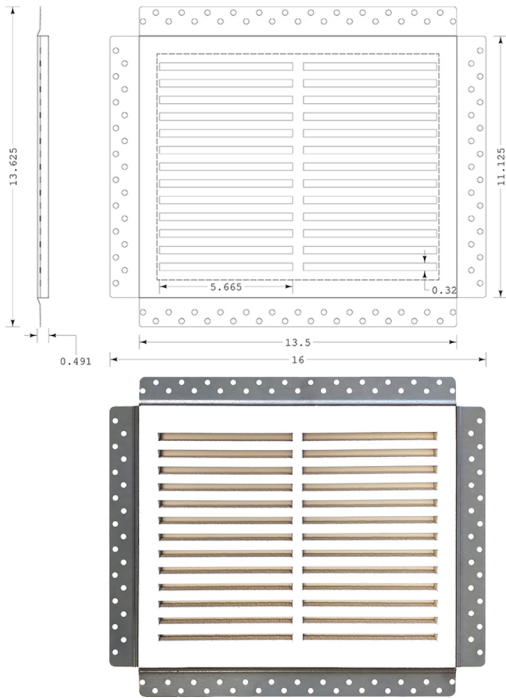

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installations.
- Not suitable for ceiling install (call for ceiling option).
- Combine with DMP14 for vent dampering and shut off.
- Rough-in's available for new builds and major renovations.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 47.4 square inches (305.8 square centimeters) of open area.
- Slot Size: 0.32" x 5.7" (8mm x 145mm).
- 26 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 16" x 13.625" x 0.5" (406mm x 346mm x 12mm).
- Product weight is 2.2 pounds (1 kilogram)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount cold air return cover which replaces the cover for a 24"x8" opening. This cover fits into the drywall opening of 26.25"x10.25" and has a vented/slotted area of 24"x8".

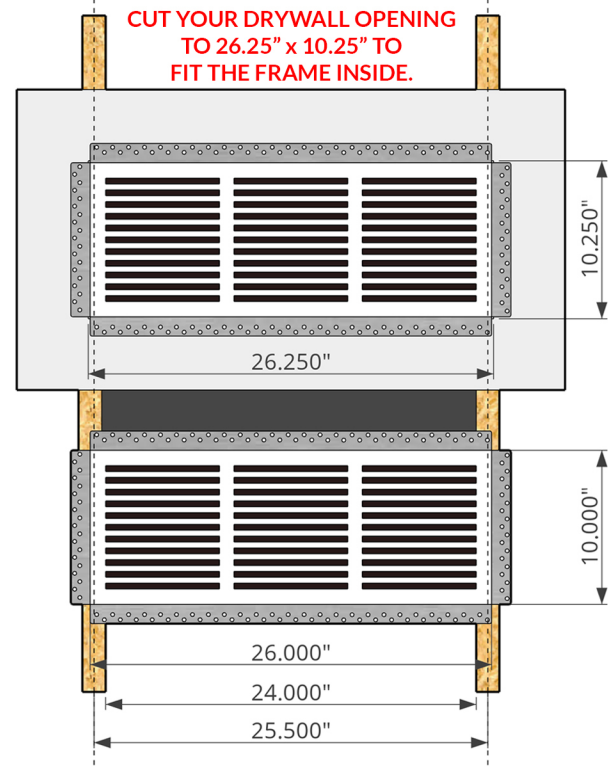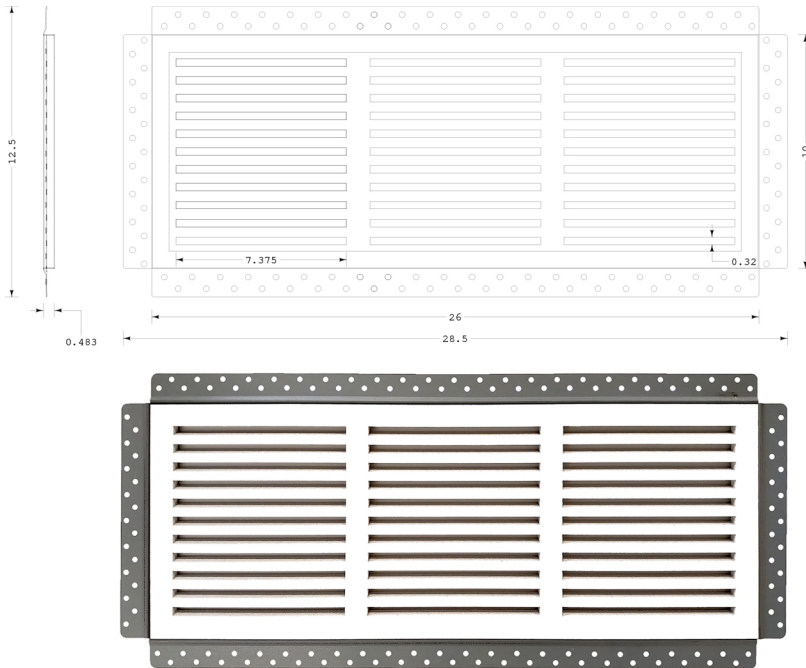

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installations.
- Not suitable for ceiling install (call for ceiling option).
- Rough-in's available for new builds and major renovations.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS




- Over 77.8 square inches (502 square centimeters) of open area.
- Slot Size: 0.32" x 7.375" (8mm x 187mm).
- 33 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 28.5" x 12.50" x 0.5" (724mm x 317mm x 12mm).
- Product weight is 3.7 pounds (1.67 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount cold air return cover which replaces the cover for a 30"x8" opening. This cover fits into the drywall opening of 29.75"x10" and has a vented/slotted area of 28"x8".

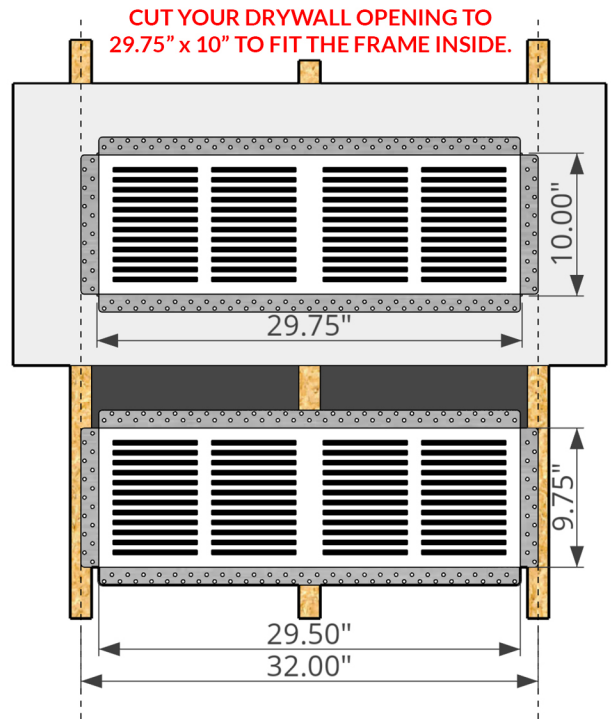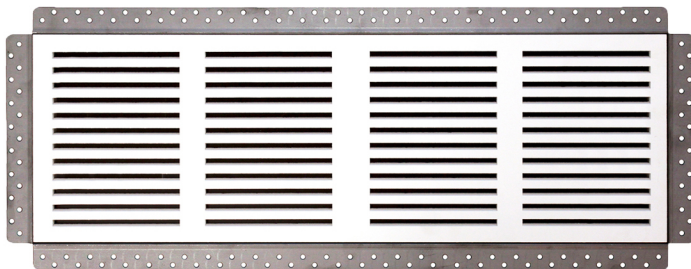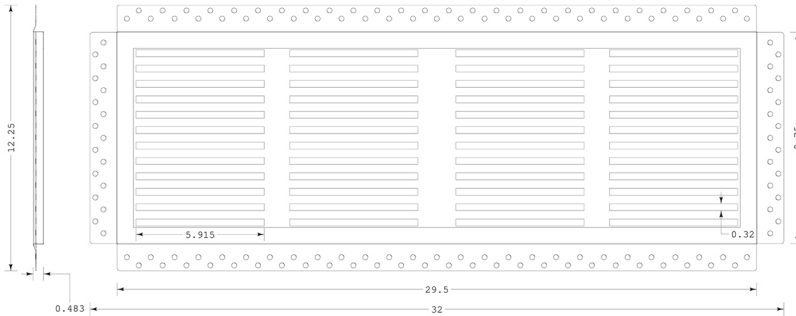

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installations.
- Not suitable for ceiling install (call for ceiling option).
- Rough-in's available for new builds and major renovations.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 90 square inches (580. square centimeters) of open area.
- Slot Size: 0.32" x 5.91" (8mm x 150mm).
- 48 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 32" x 12.25" x 0.5" (406mm x 346mm x 12mm).
- Product weight is 3.9 pounds (1.77 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount supply vent cover for a 4"x10" duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 5"x11" and has a vented/slotted area of 3"x9".

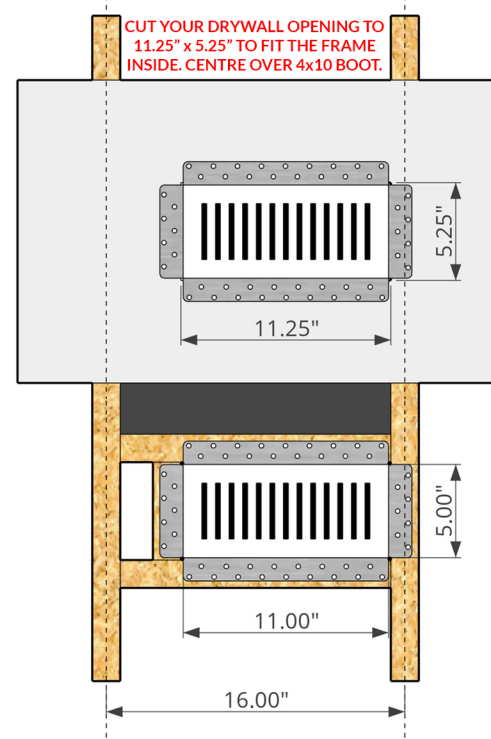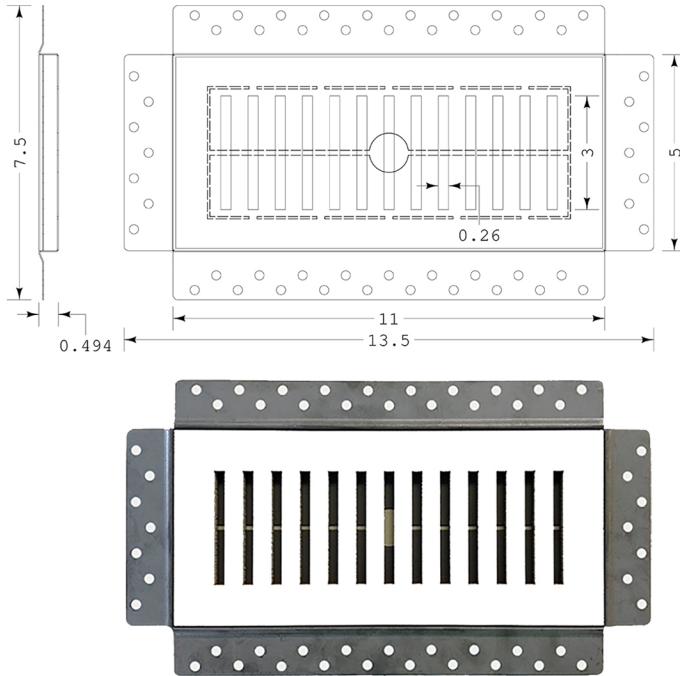

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 10.14 square inches (65.41 square centimeters) of open area.
- Slot Size: 0.26" x 3" (6.6mm x 76mm).
- 13 rectangular straight vertical slots.
- Overall dimensions are 13.5" x 7.5" x 0.5" (343mm x 190.5mm x 12mm).
- Product weight is 1.1 pounds (0.5 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount supply vent cover for a 4"x12" duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 5"x13" and has a vented/slotted area of 3"x11".

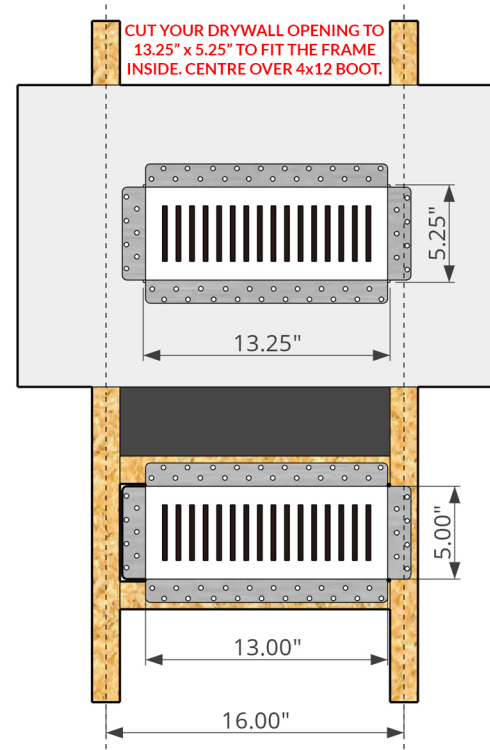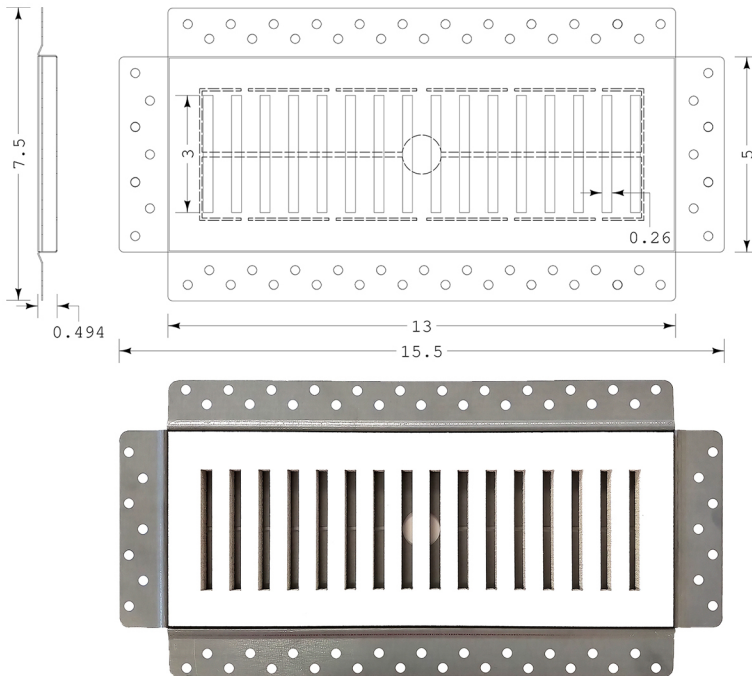

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 12.4 square inches (80.5 square centimeters) of open area.
- Slot Size: 0.26" x 3" (6.6mm x 76.2mm).
- 16 rectangular straight vertical slots.
- Overall dimensions are 15.5" x 7.5" x 0.5" (393.7mm x 190.5mm x 12mm).
- Product weight is 1.25 pounds (0.55 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount supply vent cover for a 6"x10" duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 7"x11" and has a vented/slotted area of 5"x9".

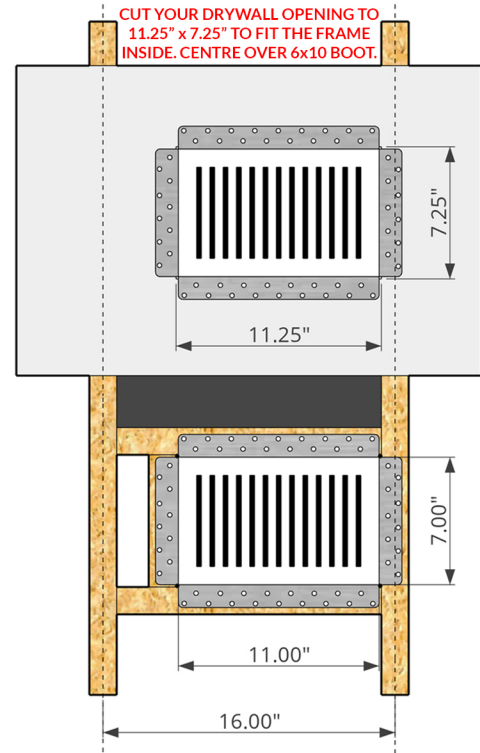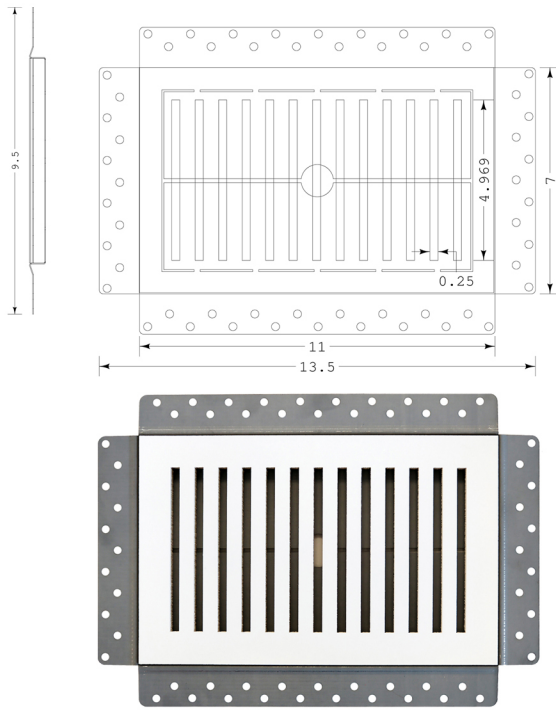

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 16 square inches (103.2 square centimeters) of open area.
- Slot Size: 0.25" x 4.96" (6.35mm x 125.98mm).
- 13 rectangular straight vertical slots.
- Overall dimensions are 13.5" x 9.5" x 0.5" (343mm x 241.3mm x 12mm).
- Product weight is 1.9 pounds (0.86 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount exhaust fan cover for a 8"x8" drywall opening. This cover can also be used as a cold air return, and yields a 6.125"x6.125" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

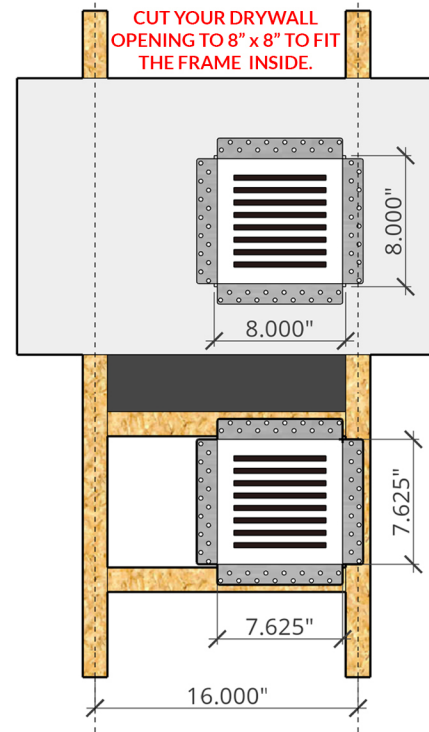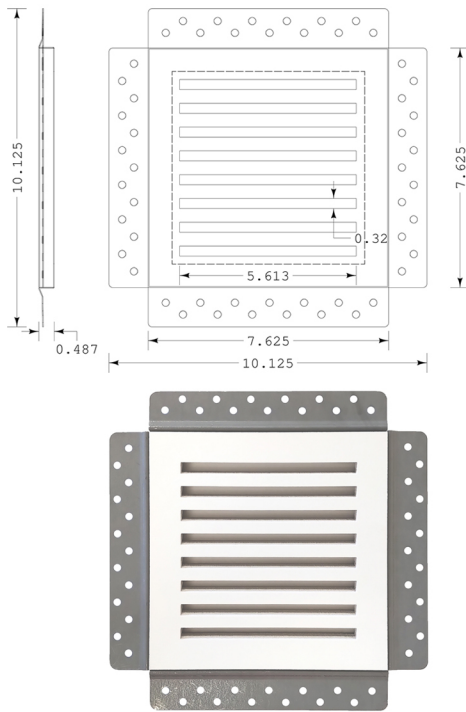

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 14.36 square inches (92.64 square centimeters) of open area.
- Slot Size: 5.613" x 0.32 (142.5mm x 8.12mm).
- 8 angled horizontal slots.
- Overall dimensions are 10.125" x 10.125" x 0.5" (257.17mm x 257.17mm x 12mm).
- Product weight is 1.2 pounds (0.54 kilograms)

MATERIAL SPECIFICATIONS

Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
 Density - 0.95 g/cm³
 Water Content - 12%
 Chloride Ion Content - 0%
 Formaldehyde Release - 0%
 Asbestos Content - 0%
 Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
 Water Absorption - 27%
 Resistant Bending Strength - 8 MPa
 Impact Resistance - 1.5 J/m
 Nail-Withdrawal strength - 16 N/mm
 Water Permeability - No water vapour after 24 hours' test
 Refractoriness (Pyrometric cone Test) - 4H
 pH Value - 6.7{8.0}
 Thermal conductivity - 0.2 W/(mK)
 Moisture Movement - 0.25 %
 Heat Shrinkage Rate - 0.05
 Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount exhaust fan cover for a 10"x10" drywall opening. This cover can also be used as a cold air return, and yields a 8.125"x8.125" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

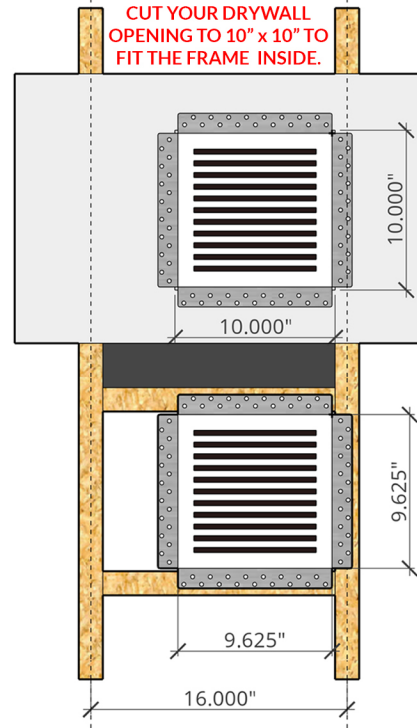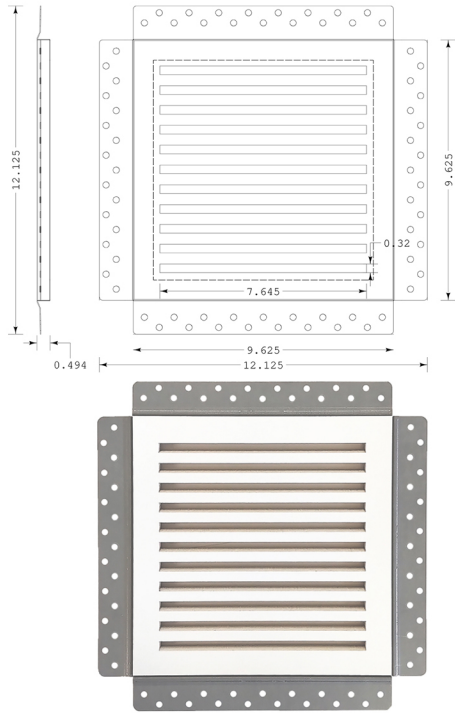

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 26.9 square inches (173.5 square centimeters) of open area.
- Slot Size: 7.645" x 0.32 (194.2mm x 8.12mm).
- 11 angled horizontal slots.
- Overall dimensions are 12.125" x 12.125" x 0.5" (307.9mm x 307.9mm x 12mm).
- Product weight is 1.7 pounds (0.78 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount exhaust fan cover for a 12"x12" drywall opening. This cover can also be used as a cold air return, and yields a 10.25"x10.25" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

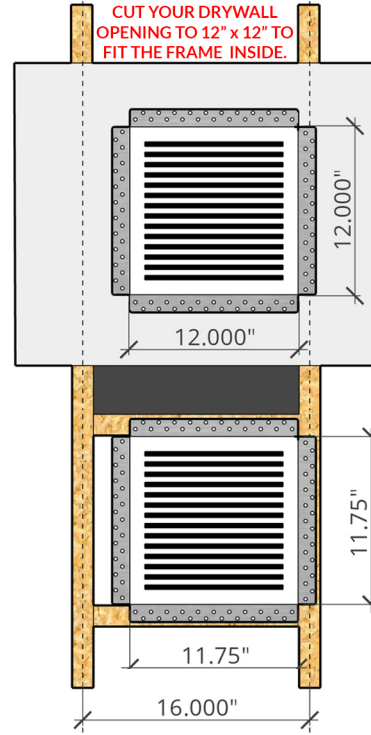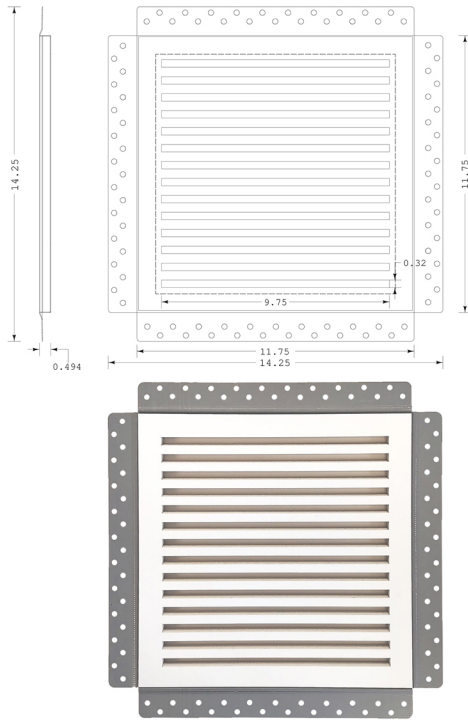

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 43.6 square inches (281.2 square centimeters) of open area.
- Slot Size: 9.75" x 0.32 (247.6mm x 8.12mm).
- 14 angled horizontal slots.
- Overall dimensions are 14.25" x 14.25" x 0.5" (361.9mm x 361.9mm x 12mm).
- Product weight is 2.2 pounds (1 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount exhaust fan cover for a 14"x14" drywall opening. This cover can also be used as a cold air return, and yields a 12.25"x12.25" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

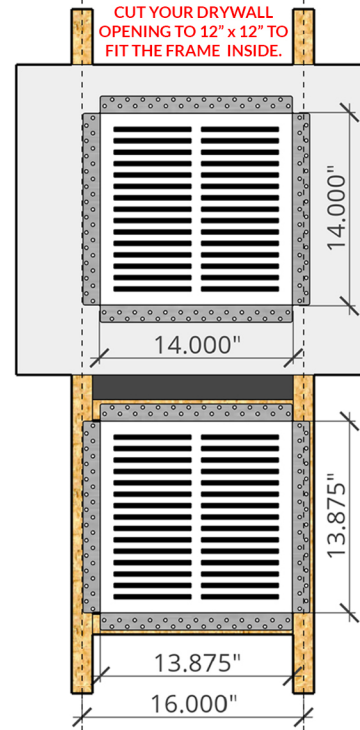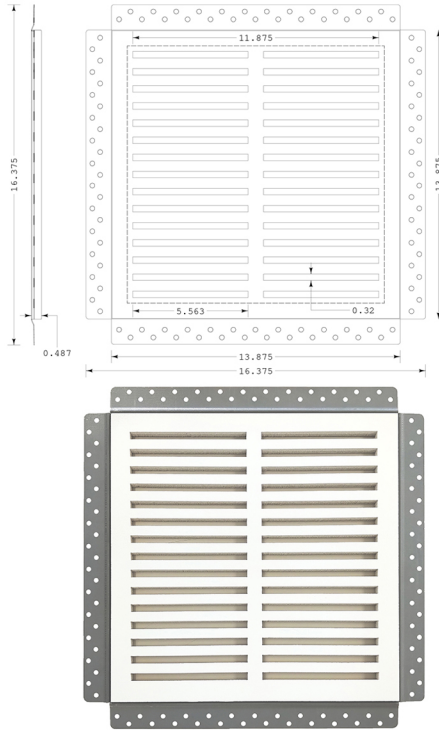

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.375" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS



- Over 150 square inches (967.7 square centimeters) of open area.
- Slot Size: 5.563" x 0.32 (141.3mm x 8.12mm).
- 30 angled horizontal slots.
- Overall dimensions are 16.375" x 16.375" x 0.5" (415.9mm x 415.9mm x 12mm).
- Product weight is 2.86 pounds (1.3 kilograms)

MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.



A premium flush mount access panel cover for a 8"x8" drywall opening. This cover can also be used on a wall or ceiling and yields a 6.125"x6.125" accessible area.

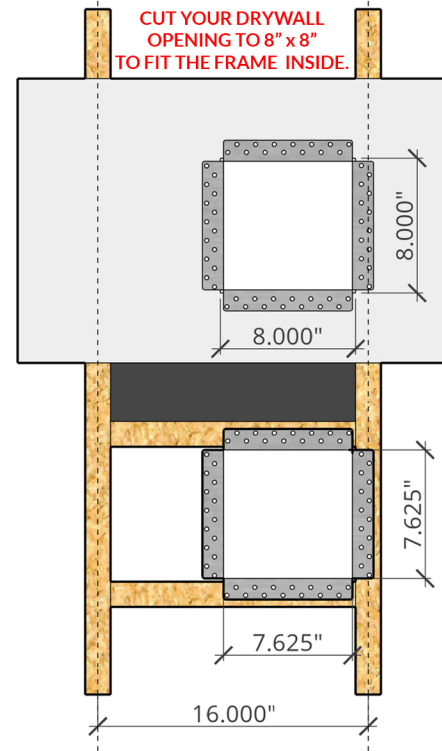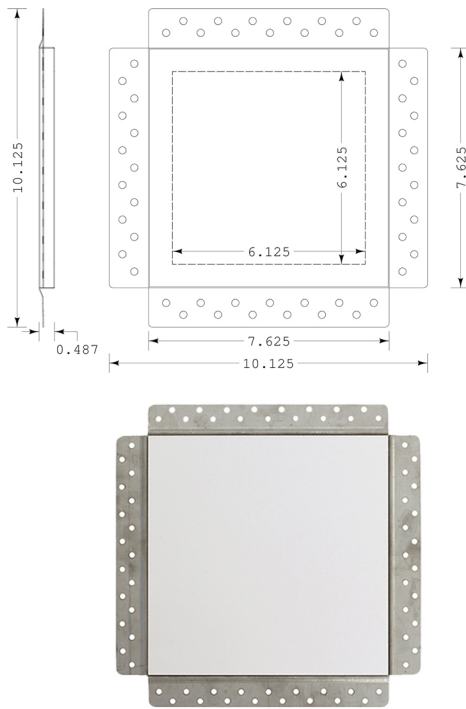

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS

- Over 37.5 square inches (241.9 square centimeters) of open area.
- Overall dimensions are 10.125" x 10.125" x 0.5" (257.17mm x 257.17mm x 12mm).
- Product weight is 1.43 pounds (0.65 kilograms)



MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

For more products,
please visit us at
www.made2match.ca
or scan below.



A premium flush mount access panel cover for a 10"x10" drywall opening. This cover can also be used on a wall or ceiling and yields a 8.125"x8.125" accessible area.

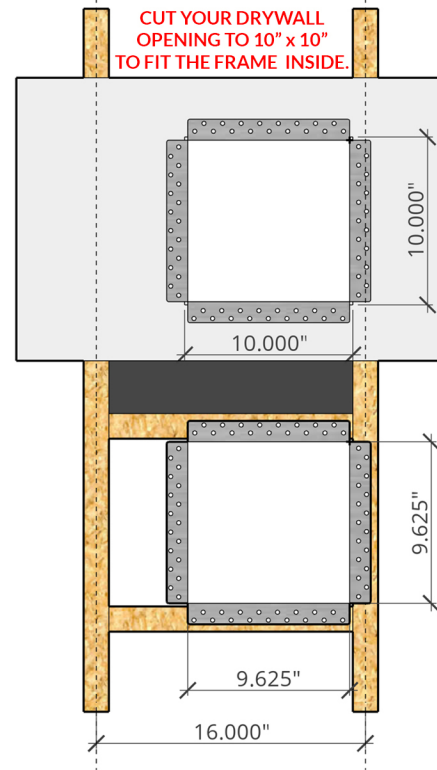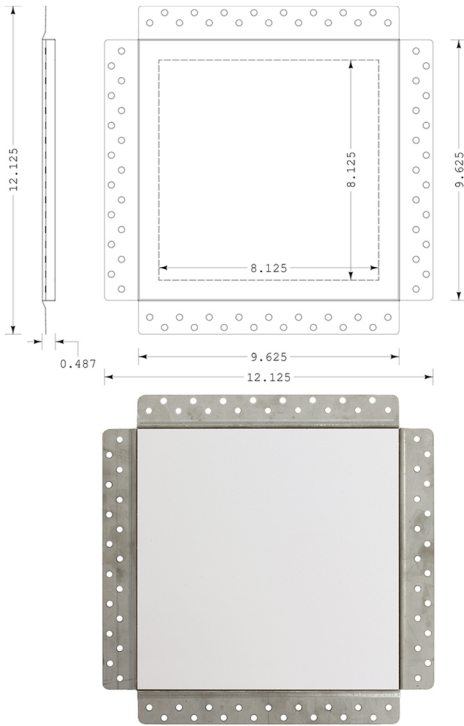

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS

- Over 66 square inches (425.8 square centimeters) of accessible area
- Overall dimensions are 12.125" x 12.125" x 0.5" (307.9mm x 307.9mm x 12mm).
- Product weight is 1.98 pounds (0.89 kilograms)



MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm³
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

For more products,
please visit us at
www.made2match.ca
or scan below.



A premium flush mount access panel cover for a 12"x12" drywall opening. This cover can also be used on a wall or ceiling and yields a 10.25"x10.25" accessible area.

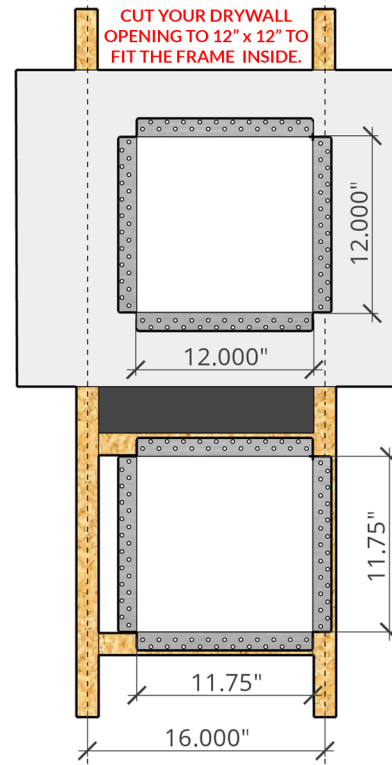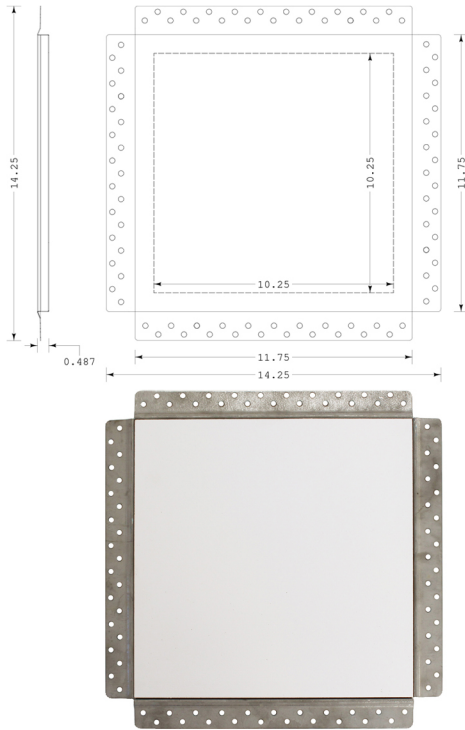

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS

- Over 105 square inches (677.4 square centimeters) of accessible area
- Overall dimensions are 14.25" x 14.25" x 0.5" (361.9mm x 361.9mm x 12mm).
- Product weight is 2.68 pounds (1.21 kilograms)

MATERIAL SPECIFICATIONS

Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
 Density - 0.95 g/cm³
 Water Content - 12%
 Chloride Ion Content - 0%
 Formaldehyde Release - 0%
 Asbestos Content - 0%
 Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
 Water Absorption - 27%
 Resistant Bending Strength - 8 MPa
 Impact Resistance - 1.5 J/m
 Nail-Withdrawal strength - 16 N/mm
 Water Permeability - No water vapour after 24 hours' test
 Refractoriness (Pyrometric cone Test) - 4H
 pH Value - 6.7{8.0}
 Thermal conductivity - 0.2 W/(mK)
 Moisture Movement - 0.25 %
 Heat Shrinkage Rate - 0.05
 Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

For more products, please visit us at www.made2match.ca or scan below.

