

# **Composed®**

Frameless pivot shower door K-27582-10L

#### **Features**

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment.
- Continuous 7/8" (22 mm) high aluminum bottom threshold.
- Back-to-back 11-1/2" (292 mm) vertical handles.
- Coordinates with other products in the Composed® collection.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

### Material

- Frameless, 3/8" (10 mm) thick Crystal Clear tempered glass.
- Anodized aluminum prevents rust and corrosion.

## Installation

- Fits opening widths 29-5/8"-30-3/8" (752-772 mm).
- 3/4" (19 mm) width adjustment.
- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

## **Included Components**

Product consists of:

27708-10L

27678

Additional Components:

Hardware kit



### Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

# KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

| Color | Code | Description             |
|-------|------|-------------------------|
|       | SHP  | Bright Polished Silver  |
|       | BL   | Matte Black             |
| 600   | BNK  | Anodized Brushed Nickel |

# Available Glass Options Code Description


L Crystal Clear






# **Composed®**

Frameless pivot shower door K-27582-10L

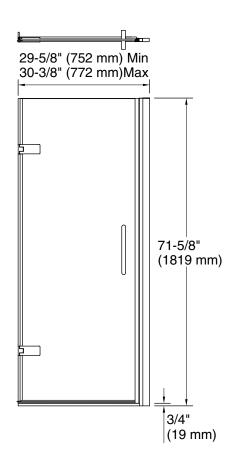

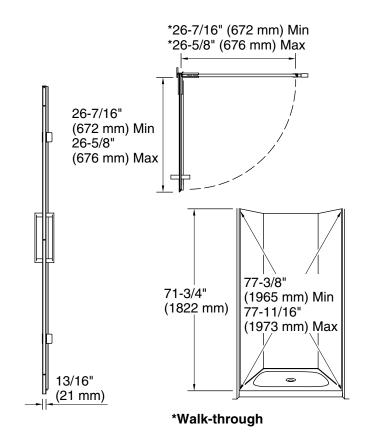

### **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - 29-5/8" (752 mm)

Min:

Opening Width - 30-3/8" (772 mm)

Max:

Walk-through - Min: 26-3/8" (670 mm)
Walk-through - Max: 26-5/8" (676 mm)

Base-To-Wall 1/4" (6 mm)

Radius - Max:

Glass thickness: 3/8" (10 mm)
Glass coating: CleanCoat®

# **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 73-1/2" (1867 mm) to allow for installation clearance.

